



**order example:**  
CAR-P-SW12-SLED-SCCT-UNV-WHT

**SERIES**

CAR-P Caribbean Pendant Series

**MOUNTING**

**Note: Diagrams/Examples Available on Page 2**

ST12 12" Stem (1/2" Dia.) w/ Static Canopy

SW12 12" Stem (1/2" Dia.) w/ Swivel Canopy

**LED WATTAGE**

**Note: Refer to Chart for Wattage / Lumen Output**

SLED Selectable LED Wattages: 21W | 28W

**LED COLOR TEMPERATURE (CCT)**

SCCT Selectable CCT:

3000K | 3500K | 4000K | 5000K

**VOLTAGE**

UNV 120/277 Universal Volt Electronic Driver

**STANDARD FINISH**

BK Black

BZ Bronze

PA Painted Aluminum

WHT White — Standard

**PREMIUM UPCHARGE FINISH**

CC Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))  
– Provide RAL# or Make-to-Match Color Chip

+NAT Conformal Coating - Light Engine Only

**CONTROL OPTIONS**

**SENSOR CONTROL** (Sensor Integral to Fixture)

OCC Occupancy Sensing | Motion Sensor Integral  
– Microwave / Single Feed / 120/277 Only  
– Stand-by Dim Level Presets: On/Off (0%/100%)  
– Max Mounting Height of Fixture: 18ft

**MISC OPTIONS**

FUS Single Fusing

SU 10KA Surge Protection (ANSI Spec C62.41.2)

**ACCESSORY OPTIONS**

**Order As A Separate Line**

REMT Remote Controller for Sensor Options

TPD Tamperproof Screwdriver

**WATTAGE / LUMEN INFORMATION**

Wattage	CCT	Lumens	Efficacy
21 Watt	3000K	3,100 Lumens	148 lm/W
	3500K	3,125 Lumens	149 lm/W
	4000K	3,150 Lumens	150 lm/W
	5000K	3,200 Lumens	152 lm/W
28 Watt	3000K	4,100 Lumens	144 lm/W
	3500K	4,125 Lumens	145 lm/W
	4000K	4,150 Lumens	146 lm/W
	5000K	4,200 Lumens	147 lm/W

Catalog Number	
Project Name & Location	Type

**Product Specifications**

**DIFFUSER:** Opal white polycarbonate is standard.

**DRIVER:** Universal Volt (120~277V) Electronic Driver. 0-10V Low Voltage Dimming (100% to 30%) is Standard.

**FINISH:** Polyester powder coat white Standard. Optional Custom Colors.

**GASKETING:** High temp, non-aging black EPDM gasketed seal. Seals diffuser to cast housing to protect against outside contaminants.

**HOUSING:** Spun aluminum housing with built-in heatsinks for thermal management.


**MOUNTING:** Pendant Mount with 12" Stem and Canopy. 1/2" NPT galvanized and powder coated, 12" long stem standard. Optional lengths available.

**COMPLIANCE:** Built to comply with U.S. and Canadian Safety Standards.


**Made in USA / Buy America Compliant / Buy American Act.**

MOUNTING DETAILS

DIMENSIONS

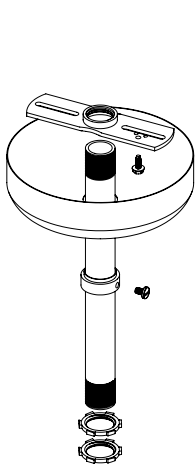

**ST12** = 12" Stem (1/2" Dia.)  
w/ Static Canopy

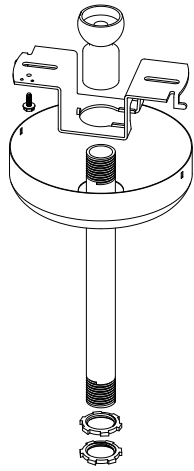

**SW12** = 12" Stem (1/2" Dia.)  
w/ Swivel Canopy

