


The UVC Collection UVC-SLD

UV-C Recessed Downlight - Anti-Bacterial Sterilization | Selectable Wattage/CCT

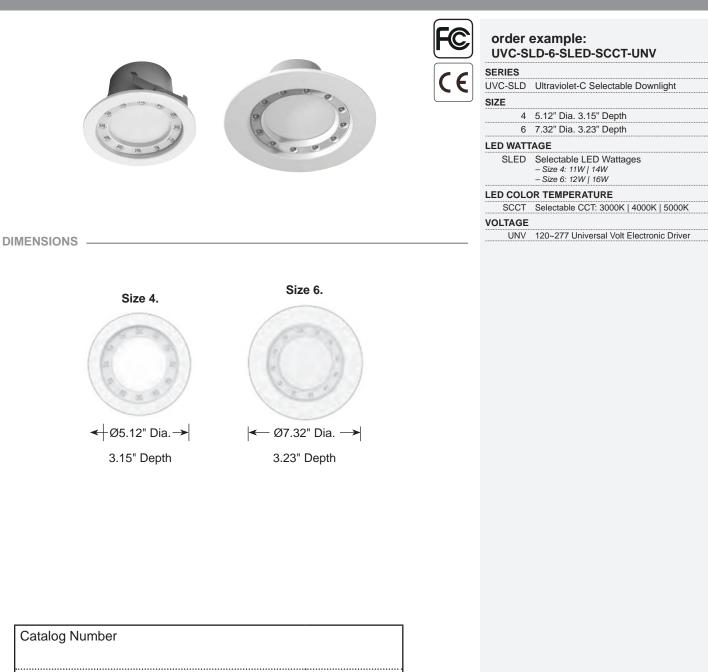

Product Specifications

Project Name & Location

APPLICATIONS: Schools, Clinics, Hotels, Restaurants, Theaters, Factories, Offices. DISINFECTION MODES: 2-Hour Mode / 20min Auto Mode. DRIVER: Universal Voltage 120/277V electronic driver.

FINISH: White.

HOUSING: Die Aluminum housing.

LAMPING: LED and UV-C LED. Selectable LED Wattage and CCT. UVC-LED 18W Power.

LIFESPAN: >35,000 Hours LED / >10,000 Hours UVC-LED MOUNTING: Recessed mount via torsion springs. SENSOR: 5.8G Frequency / 29.5sq.ft coverage. UVC WAVELENGTH: 260-285nm COMPLIANCE: Built to comply with U.S. and Canadian safety standards. FCC, CE Certified.

WARRANTY: 2-year Limited Warranty.

Type




UVC-SLD

The UVC Collection

UV-C Recessed Downlight - Anti-Bacterial Sterilization | Selectable Wattage/CCT

SELECTABLE WATTAGE / CCT -

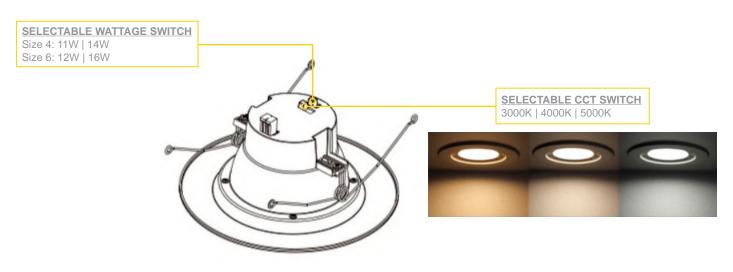

LIGHTING MODES / OPERATION





