



Rectangular Windows (RW)

Front Facing Perfix Window (PX)

Solid Front Window (SF)



order example:
VS2-RW-14-SLED-SCCT-BK-PHOT-TP

SERIES

VS2 Vista 2 Series

WINDOW / FASCIA STYLE

RW Rectangular Window
PX Front Facing Perfix Window
SF Solid Front (No Window)

SIZE

14 14" Height x 5" Width x 4" Depth

LED WATTAGE

Note: Refer to Chart for Wattage / Lumen Output

SLED *Selectable LED Wattages: 18W | 20W | 22W

LED COLOR TEMPERATURE (CCT)

SCCT *Selectable CCT: 3000K | 4000K | 5000K

VOLTAGE

UNV 120-277 Universal Volt Electronic Driver

STANDARD FINISH

BK Black
BZ Bronze
PA Painted Aluminum
WHT White

PREMIUM UPCHARGE FINISH

CC Custom Color (Visit www.ralcolor.com)
— Provide RAL# for Make-to-Match Color Chip

PHOTOCELL OPTION

PHOT Photocell


MISC OPTION

TP Torx Tamperproof Screws

***NOTE:** Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

Selectable Wattage / Lumen Output

Wattage / Lumen Output			
Setting	Low Power	Medium Power	High Power
Large	18 Watt (2160 Lumens)	20 Watt (2400 Lumens)	22 Watt (2640 Lumens)

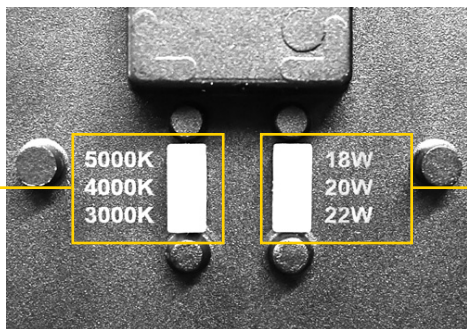

Selectable CCT Switch
3000K | 4000K | 5000K

Selectable Wattage Switch
18W | 20W | 22W

Selectable Wattage / CCT Switches
Located on Back of Fixture

Catalog Number	
Project Name & Location	Type

Product Specifications

DRIVER: Universal Voltage 120/277v Electronic Driver.

FINISH: Corrosion Resistant Polyester Powder Coated Finish.

HOUSING: Formed Aluminum Housing. Die-cast wall mount plate.

LENS: Anti-Yellowing and High Transmission Polycarbonate Diffuser.

LIGHT ENGINE: Energy Efficient Light Emitting Diode (LED) - Selectable Wattage / CCT.

Wattages: 18W, 20W or 22W / CCT: 3000K, 4000K or 5000K.

LED LIFETIME: ≥50,000hrs.


MOUNTING: Mounts to standard 3" and 4" recessed junction boxes via mounting strap. Can also be 4-point mounted via supplied mounting screws.

OPERATING AMBIENT TEMPERATURE: -20°C to +40°C (-4°F to 122°F)

COMPLIANCE: Built to comply with U.S. and Canadian safety standards. RoHS and ADA Compliant. Made in USA. IP66 Rated, suitable for wet location.

WARRANTY: 5-Year Limited Warranty.

DIMENSIONS

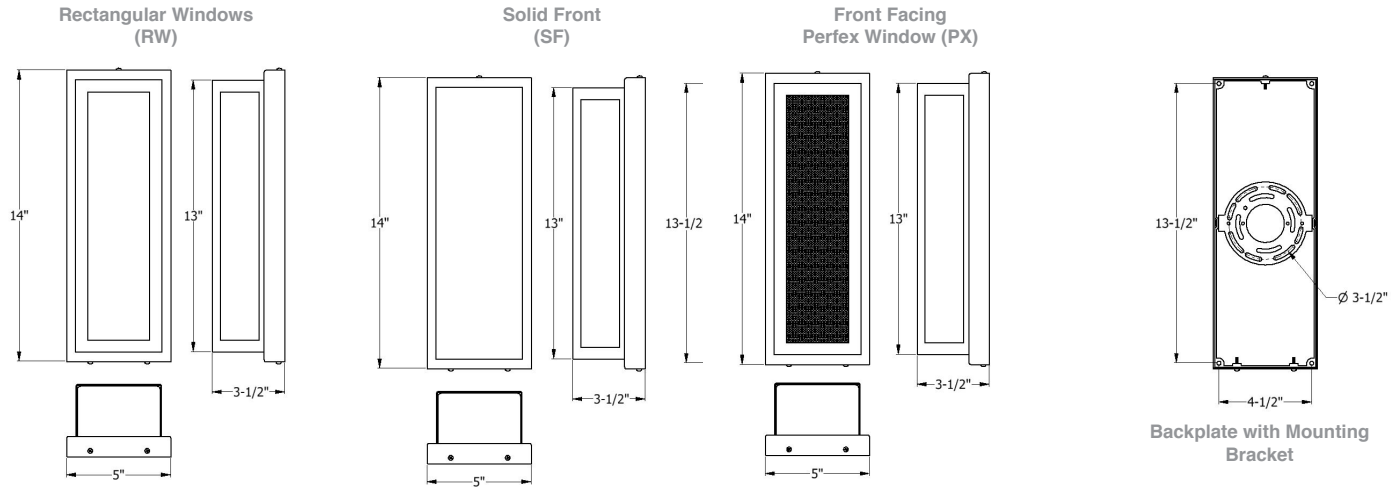

APPLICATIONS



Applications

- Apartments
- Condominiums
- Affordable Housing
- Dormitories
- Hospitality
- Senior Housing
- Assisted Living
- Public Storage
- Military