





The Cylinder Collection

VENTURA

Decorative Ceiling or Wall Mount




DIMENSIONS

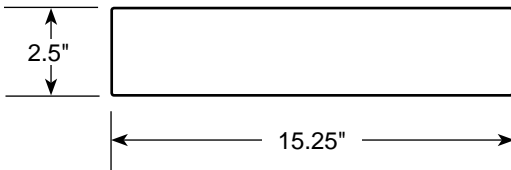

MOUNTING DIMENSIONS

AIRCRAFT CABLE MOUNTING

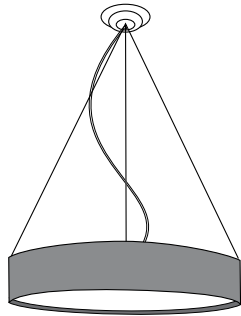

Adjustable Aircraft Cable (AAC)
Up to 120"

Catalog Number	
Project Name & Location	Type

Product Specifications

DRIVER: Universal Voltage 120/277v Electronic Driver is standard for LED.

DIFFUSER: Opal Acrylic Standard. Optional Polycarbonate.

DECORATIVE TRIM: Heavy Gauge Aluminum with Solid Shield Trim.

EMERGENCY: LED — Remote Emergency Battery.

FINISH: Heavy Gauge Aluminum Trim. White Polyurethane Powder Coated Finish is Standard.

HARDWARE INCLUDED: (1) J Boxstrap, (1) Nipple, (1) Cap Nut.

LIGHT ENGINE: Energy Efficient Light Emitting Diode (LED).

MOUNTING: Center Access Hole For Mounting To A "J" Box.

PAN: White Polyurethane Finished Aluminum.

SCREWS: Brass Thumb Screw.

COMPLIANCE: Built to comply with U.S. and Canadian safety standards. Suitable for damp locations.

Made in USA / Buy America Compliant / Buy American Act.

order example:

VN-M-LED25-CT4-80CRI-UNV-WHT-SM-BLD

SERIES

VN-M Ventura Series

LED WATTAGE

LED25 25 Watt LED

LED COLOR TEMPERATURE (CCT)

CT3 ±3000K LED Color Temp

CT35 ±3500K LED Color Temp

CT4 ±4000K LED Color Temp

CT5 ±5000K LED Color Temp

COLOR RENDERING INDEX (CRI)

80CRI 80 Color Rendering Index (STANDARD)

90CRI 90 Color Rendering Index
— Not Available for 5K

VOLTAGE

347 347 Volts [Consult Factory]

UNV 120–277 Universal Volt Driver

STANDARD FINISH

WHT White — STANDARD

PREMIUM UPCHARGE FINISH

BK Black

BZ Bronze

PA Painted Aluminum

SV Silver Gray

CC Custom Color (Visit www.ralcolor.com)
— Provide RAL# or Make-to-Match Color Chip

INHIBITOR FINISH

+NAT Epoxy Coating for Natatorium
— LED Boards Only

MOUNTING

SM Surface Mount — STANDARD

AAC Adjustable Aircraft Cable (Up to 120")

PM12-SWC-RR Pendant 12" Length Conduit Stem (½" IPS)
— Includes Swivel Canopy for 4" Round Box

PM24-SWC-RR Pendant 24" Length Conduit Stem (½" IPS)
— Includes Swivel Canopy for 4" Round Box

PM36-SWC-RR Pendant 36" Length Conduit Stem (½" IPS)
— Includes Swivel Canopy for 4" Round Box

PMXX-SWC-RR Pendant Custom Length Conduit Stem (½" IPS)
— Includes Swivel Canopy for 4" Round Box

CONTROL OPTIONS (Choose Manual or Sensor Control)

MANUAL CONTROL (Wall Switch or Control System)

Note: Cannot be used with Sensor Controls Below
Note: 0-10V (100-30%) Dimming is Standard

0-10D1 0-10VDC LED Dimming Driver (100-10%)

0-10D2 0-10VDC LED Dimming Driver (100-1%)

BLS Bi-Level Switching - Uses 2 Drivers (2UNV)

OR

SENSOR CONTROL (Sensor Integral to Fixture)

Note: Cannot be used with Manual Controls Above
Note: Motion Sensor Max Mounting Height 18-Feet

OCC Occupancy Sensing | Motion Sensor Integral
— Microwave / Single Feed / 120/277 Only
— Stand-by Dim Level Presets: On/Off (0%/100%)

BLD Bi-Level Dimming | Motion Sensor Integral
— Microwave / Single Feed / 120/277 Only
— Stand-by Dim Level Presets:
10% / 20% / 30% (Standard) / 50%
— NOTE: BLD not compatible with REM Options

MISC OPTIONS


FUS Single Fusing

FUS2 Double Fusing

TPS Tamperproof Screws

Additional Options on PAGE 2

PENDANT CANOPY SWIVEL KIT

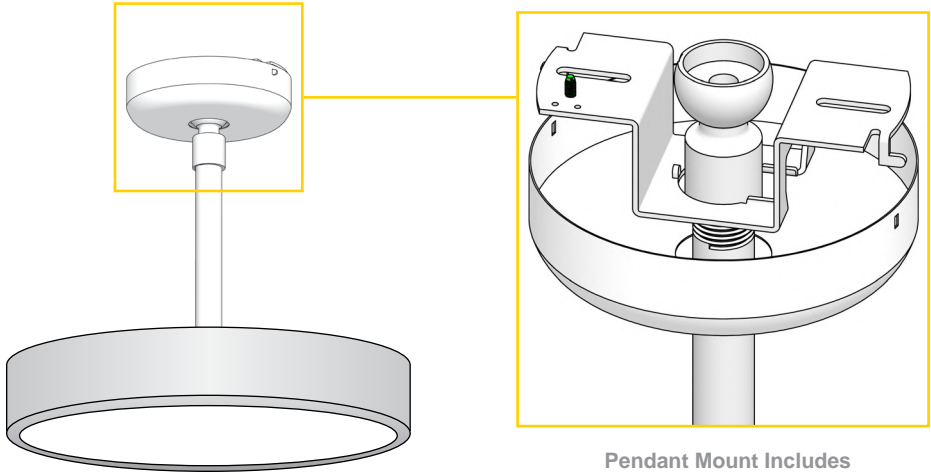

Pendant Mount Includes
 Canopy Swivel Kit

EMERGENCY / BATTERY OPTIONS

- Emergency Battery Options Meet California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standards (Cold Weather is NON-CEC)
- Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C
- Constant Power Batteries have Constant Lumens
- Max Whip Length for REM is 8ft

EM8W Integral 8 Watt LED

REM8W Remote 8 Watt LED

REM10W- Remote 10 Watt LED - Cold Weather CW

ACCESSORY OPTIONS

Order As A Separate Line

REMT0019 Remote Controller for Sensor Options

TPD Tamperproof Screwdriver